


Two LSD-2's for Fax, Emergency Phone and Alarm Panel Line Share

The LSD-2 is often used to provide priority access to a phone line for an emergency phone or an alarm panel. Some applications require line share with an outgoing fax but priority access for both an emergency phone and an alarm panel, with the alarm panel having the highest "priority" and all inbound calls answered by the alarm panel. Two LSD-2's can be used to accomplish this. The fax will be dropped from the line when the emergency phone or alarm panel is activated (highest priority).

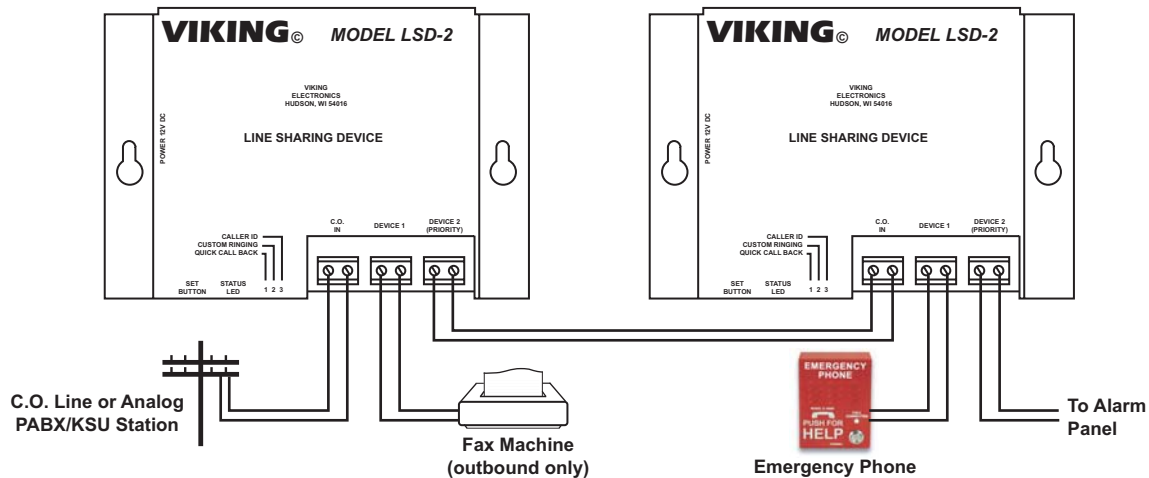

- Notes: 1. All DIP switches off on both LSD-2's.
2. When AC power is lost, dial tone is provided to the alarm panel only.

DOD# 921